

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
13 May 2004 (13.05.2004)

PCT

(10) International Publication Number
WO 2004/040156 A2

(51) International Patent Classification⁷: F16D 3/00

(21) International Application Number:
PCT/EP2003/012173

(22) International Filing Date: 31 October 2003 (31.10.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
TO2002A000943 31 October 2002 (31.10.2002) IT

(71) Applicant and

(72) Inventor: VARRIALE, Vincenzo [IT/IT]; Via Trento 1/D,
I-20060 Cassina de' Pecchi - Milano (IT).

(74) Agents: BOTTI, Mario et al.; Botti & Ferrari S.r.l., Via
Locatelli, 5, I-20124 Milano (IT).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE,
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK,
MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT,
RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,
SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished
upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: TIGHT CONTROL DEVICE

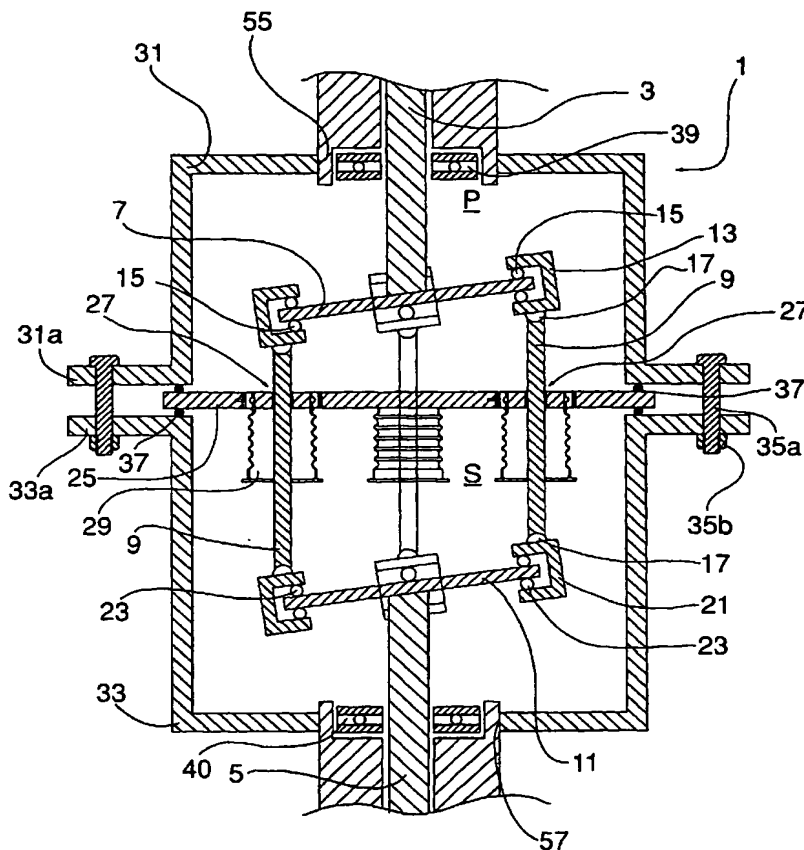

(57) Abstract: A tight control device (1) for the transmission of a rotary motion from a primary shaft (3) to a secondary shaft (5), allowing the volume (P) housing the primary shaft (3) to be separated in a tightly manner from the volume (S) housing the secondary shaft (5), said device comprising a couple of sloped parallel rotating plates (7, 11), each one being fixed to a corresponding one of said shafts (3, 5), interconnected by means of oscillating parallel rods (9), articulated to corresponding C-shaped cages (13, 21) arranged around said plates (7, 11), in order to allow said plates (7, 11) to rotate therein.

WO 2004/040156 A2